

KM-C2525E

▶ print ▶ copy ▶ scan ▶ fax

A3 COLOUR MULTIFUNCTIONAL

LET COLOUR WORK FOR YOU.

This new multifunctional delivers high-quality colour output and high-productivity at the same time. Reliable and easy to use, it can carry out one job while another is in progress, ensuring deadlines are met. With a fast warm-up time, it's also fully upgradeable by means of a range of optional enhancements.

- 25 pages per minute monochrome printing and copying, 25 pages per minute colour printing and copying
- Standard duplex printing
- Standard network printing and scanning in colour
- 768MB copy memory standard, 40GB HDD
- 256MB printer memory standard, upgradeable to 1GB
- Long-life components for outstanding reliability

Product depicted includes optional extras

Area Separation Processing treats text and photos in different ways, for optimum copy and scan results.



Can also be upgraded with a 1,000-sheet finisher, to give your work that professional edge.



 **KYOCERA**

KM-C2525E

A3 COLOUR MULTIFUNCTIONAL

The KM-C2525E incorporates extremely durable components that guarantee efficient and reliable operation to meet the demanding requirements of busy office environments. The KM-C2525E provides effective productivity and maximises up-time whilst ensuring a minimum impact on the environment.

GENERAL

Technology: Kyocera Laser Colour
Engine speed: Max. 25/13 pages per minute A4/A3 in b/w mode, max. 25/13 pages per minute A4/A3 in full colour mode
Resolution: 600 x 600 dpi multi bit technology (9,600 dpi level x 600 dpi)
Time to first copy: 5.9 seconds or less in b/w, 7.9 seconds or less in colour
Warm-up time: 45 seconds or less
Power Source: AC 220 V ~ 240 V, 50/60 Hz
Power Consumption: Printing: 700 W, Stand-By: 230 W, Power-Saving (ECOpower): 17 W
Noise (ISO 7779): Printing: 65.5 dB(A), Stand-By: 53.3 dB(A) Power-Saving (ECOpower): Immeasurably low
Dimensions (W x D x H): Main unit: 605 x 660 x 745 mm
Weight: Main unit: Approx. 98 kg
Certification: TÜV/GS, CE, PTS
This product is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard.

PAPER HANDLING

All paper capacities quoted are based on a paper thickness of max. 0.11 mm. Please use paper recommended by Kyocera under normal environmental conditions.

Input capacity: 2 x 500-sheet universal paper cassette, 60-105g/m², A3-A5R, Letter, Legal, Custom (over A4 size up to 250 sheets)
100-sheet multi-purpose tray, 60-220g/m², A3-A6R, Folio, envelopes
Max. input capacity with options: 4,100 sheets
Duplex as standard supports A3-A5, 60-105g/m²
Output capacity: 250 sheets

COPY FUNCTIONS

Max. original size: A3
Continuous copying: 1-999
Memory capacity: Standard 768MB (max. 768MB) + 40GB HDD
Zoom range: 25-400% in 1% steps
Preset magnification ratios: 5R / 5E
Digital features: Auto colour selection, auto cassette change, auto paper selection, auto magnification selection, energy save mode, interrupt copy, scan-once-print-many, electronic sort, rotate copy, booklet copy, N-up copy, page numbering, cover mode, invert, mirror, poster mode, border erase, OHP mode, image repeat copy
Exposure mode: Auto, manual: 7 or 13 steps
Image adjustments: Text, Mixed, Print, Photo, Map colour balance adjustment, hue adjustment, one-touch colour adjustment

Your Kyocera Business Partner:

PRINT FUNCTIONS

Processor: PowerPC 750FL / 600MHz
Memory: Standard 256MB (max. 1GB) + 40GB HDD (HD-5)
Emulations: PCL 6/PCL 5e/PCL 5c, KPDL3 (PostScript 3 compatible), KC-GL (HP-7550A), PDF direct printing
Controller language: PRESCRIBE IIc
Fonts: 80 outline fonts (PCL6), 136 outline fonts (KPDL3), 1 bitmap font, 45 types of one-dimensional barcodes, plus two-dimensional barcode PDF-417
Print features: eMPS – for quick copy, proof and hold, private print

Interfaces

Standard interface: High-speed bi-directional parallel (IEEE 1284), USB 2.0 (Hi-Speed), Fast Ethernet 10/100Base-TX, 2 KUJO-LV slots
Multiple interface connection (MIC): Allows simultaneous data transfer via up to four interfaces, with each interface having its own virtual printer.

SCAN FUNCTIONS

Functionality: Scan-to-PC, scan-to-email, scan-to-FTP network TWAIN, scan-to-SMB
Scan speed: 32 originals per minute (600 dpi/A4)
Scan resolution: 600, 400, 300, 200 dpi (256 grayscales)
Max. scan size: A3
Original recognition: Text, photo, text + photo, OCR
Interface: 10/100Base-TX
Network protocol: TCP/IP
File types: Colour: PDF, JPEG, TIFF
Mono: PDF, TIFF
Compression format: TIFF (MMR), colour: JPEG
Features: High-compression PDF, Encrypted PDF
Bundled software: DB-Assistant, Scanner file utility, Address book, Address editor, TWAIN Source
Applicable OS: Windows® 95, 98, Me, NT4.0, 2000, XP, Vista, Server 2003

FAX FUNCTIONS (OPTIONAL)

Compatibility: ITU-T Super G3
Modem speed: Max. 33.6 kbps
Transmission speed: 2 seconds or less (JBIG)
Scanning speed: 1 second
Scanning density: Normal: 8 dot/mm x 3.85 line/mm, Fine: 8 dot/mm x 7.7 line/mm, Superfine: 8 dot/mm x 15.4 line/mm, Ultrafine: 16 dot/mm x 15.4 line/mm (with optional memory), halftone
Max. original size: A3
Compression method: JBIG, MMR, MR, MH
Memory: Standard 4MB, max. 32MB
Features: Network faxing, rotate transmission, duplex fax reception, N-up reception, mailbox, remote diagnostics

OPTIONS

Fax system (N)

Paper handling
DP-710 Document processor: Reversing document processor, 100 sheets, 35-160g/m², A3-A5R, Folio (ADF)
100 sheets, 50-120g/m², A3-A5R, Folio (RADF)
PF-710 Paper feeder: 2 x 500 sheets, 60-105g/m², A3-A5R, Folio
PF-750 Paper feeder: Max. 3,000 sheets, 60-105g/m², A4, B5, Letter
DF-710 Document finisher + AK-710*:
Main tray: Max. 3,000 sheets A4 or 1,500 sheets A3 face-down, 60-105g/m², A3-B5,
Sub tray left: Max. 200 sheets A4 or 100 sheets A3/B4 face-up, 60-105g/m², A3-A6R,
Sub tray right: Max. 50 sheets A4 face-up, 60-105g/m², A4-A6R,
Stapling: Max. 50 sheets A4 or 30 sheets A3, stapling at 3 positions

DF-730 Document finisher: Max. 1,000 sheets A4 or 500 sheets A3/B4, 64-105g/m², A3-B5, one position stapling max. 30 sheets A4 or 20 sheets A3/B4, 64-105g/m²
PH-5C/PH-5D Punch unit for DF-710: A3-A5R, 60-105g/m², 2-hole/4-hole/Swedish type
MT-710 Mailbox for DF-710: 7 bins, 60-80g/m², A3-A5R, 7 bins x 100 sheets A4 or 50 sheets A3/B4
BF-710 Booklet unit for DF-710: Max. 64 pages (16 sheets) booklet folding and stapling, 60-80g/m², cover sheet 60-105g/m², A3, B4, A4R
JS-710 Job separator:** 100 sheets internal job separator, 60-105g/m², A3-A5R

*Adapter-Kit AK-710 is required for the use of DF-710 document finisher.

**JS-710 is required for the use of DF-710/DF-730 document finisher.

The use of the hard disk HD-5 or extended RAM-Disk size is highly recommended to achieve full document finisher functionality.

Memory

Printer Memory
DIMM memory: DDR SDRAM DIMM 2 slots (64, 128, 256, 512MB), 1 slot empty
CompactFlash® card: 1 slot, formats, fonts and macro storage
HD-5 Hard disk: 40GB, storage of data, formats, fonts etc. + eMPS, booklet printing
Fax Memory
MM-13-32: Image memory (28MB)

Security

Data security kit (D)

Optional interface for print functions

IB-23 Network card: 10Base-T/100Base-TX
SB-70 Network card: Wireless LAN – IEEE 802.11b
SB-110FX Network card: 10Base-T/100Base-TX/100Base-FX, FibreOptic
SB-110 Network card: 10-Base-T/100Base-TX
IB-11 Serial interface: RS-232C serial interface (max. 115.2 kbps)

Others

Platen cover (D)


CB-700 Cabinet: Wooden desk with storage capacity
CB-710 Cabinet: Metal desk with storage cap

CONSUMABLES

TK-825Y Toner-kit: Microfine toner yellow for 7,000 pages at 5% A4 coverage
TK-825M Toner-kit: Microfine toner magenta for 7,000 pages at 5% A4 coverage
TK-825C Toner-kit: Microfine toner cyan for 7,000 pages at 5% A4 coverage
TK-825K Toner-kit: Microfine toner black for 15,000 pages at 5% A4 coverage



Select your options to suit your needs:

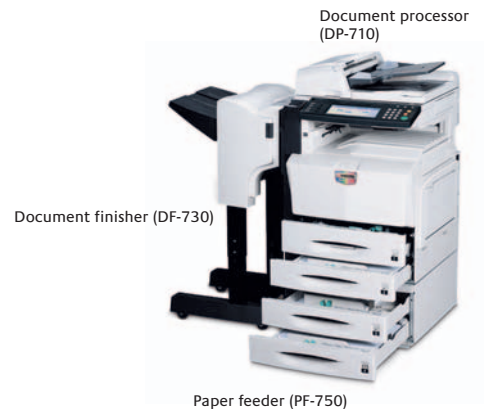

Product depicted includes optional extras

KYOCERA MITA Europe B.V., Hoeksteen 40, 2132 MS Hoofddorp, The Netherlands, Tel +31 (0) 20 65 40 000, Fax +31 (0) 20 65 31 256, www.kyoceramita-europe.com, info@kyoceramita-europe.com
KYOCERA MITA Corporation, 2-28, 1-Chome, Tamatsukuri, Chuo-Ku, Osaka 540-8585, Japan, www.kyoceramita.com

Kyocera does not warrant that any specifications mentioned will be error-free. Specifications are subject to change without notice. Information is correct at time of going to press. All other brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

KYOCERA